

# DVR vehicle inspection mirror

## Instruction

**Model:MCD-V3D**



## INSTRUCTION

Thank you for purchasing our products, this product is the latest vehicle inspection mirror with a DVR function, outer zone SD expansion card slot, when working, you can also record the whole working process, can also record the file through the USB interface on the device to save the file to a computer or other storage media to facilitate a long time to save data. In addition, the device's display do not only has the general features of the liquid crystal display, but also a multifunction multimedia player. In your spare time, you can play multimedia files and browse e-albums and book. details please following the use of product operation


Before using this product, please read the instructions carefully and properly and kept for future inspection

## INTRODUCTION OF STRUCTION



## INTRODUCTION OF LCD/DVR

### 一、 Function keys (Figure 2)

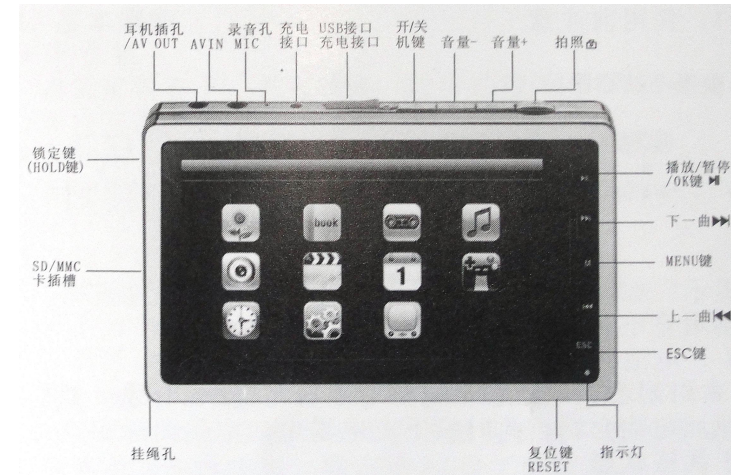

### 二、 Basic function and the introduction of Icon

To allow users to quickly master the use of the product, the product instructions, only highlights the surveillance video recording and video playback capabilities, other functions, depending on introduction to learning the use of function keys

1. A music player: Support MP3/WMA/AMR/ACC/FLAC/AP
2. Video display: Support RM/RMVB/3GP/MP4/FLV/AVI/ASF
3. Picture browsing Support JPEG format pictures, Full screen display, thumbnail display, slide show.
4. E-book: You can read TXT text.
5. Audio: microphone recording.
6. Shooting

7. Video output
8. Surveillance video: This function will explain the details on the operating instructions.
9. Games and calendar functions
10. System Setup Function
11. Function with a SD expansion slot




figure 三











## OPERATION INTRODUCTIONS

### 一. Device Attachment

First , remove the parts from the box, according to description of product structure (Figure 2) to connect the equipment, turn on the power switch of the host box, and then specific operations displayed on the DVR.

### 二. Monitor operation introduction

1、 Long press the power button on  on the screen last three seconds to boot, under the boot state, long press the power button is off screen, to withdraw from the Actions menu, press the ESC key.

- 2、 Press the key of VOL + or VOL- key to move the highlight icon to the surveillance video recording icon, press  to enter the function of the menu.
- 3、 Into the TV recording feature, video signal will be displayed on the screen from the camera, this time in the upper left corner of the screen will appear a circle logo and the sign of 00:00:00 - 0% that showing the camera is at the status of real-time monitoring,At this point press function key "M" can set record mode, with  and  /VOL + and VOL- keys can set the video preferences. There are three set mode: input mode, resolution settings and definition quality setting. you can generally use the system default, when set up and press "ESC" key to return to recording standby.If you want to record the monitored image, then press , the circle mark will turn from green to red, then this time it has entered the record state, the original 00:00:00 - 0% signs started to show recording time and memory space progress.
- 4、 After recording press  to record the document by the file name TVRECxxx.MP4 saved in the RECORD folder. When finished, press the ESC key to return to the main menu interface.
- 5、 Play recorded video:  
After opening screen, enter the main menu, use the VOL + / VOL- keys to move the cursor to the video player icon, press  buttons to enter the function menu, the RECORD folder appears on the screen, press  to enter the folder and use  and  to choose video files you want to play, press  to play . The first recorded document will appear in the top row of the screen, the final recording documents showing the end of lines in the most

## BATTERY

### 一、 HOST BOX CHARGE

When the screen images distorted or no images and the indicator behind the host box is not extinguished, you should charge the host box. Using the 13.8V/1000mA charger to charge the Host Box, at the process, at first it is red, when full, it is green

### 二、 LCD/DVR CHARGE

When appears the low-voltage logo on the screen or automatic shutdown, you need to use the 5V/1A of small charger to charge the DVR. Charging time is normally 4-8 hours, preferably not more than 8 hours, or DVR's Built-in battery life will be affected. In the process of charging, DVR the will be a small indicator light is red on the lower right corner of DVR , green when it is full.

## PACKAGE LIST

One Camera

One Host Box (with Aluminum)

One DVR /LCD

Two Charger (13.8V/1000mA、5V/1A)

## SPECIFICATION

### 一、 CAMERA:

Resolution: 1 / 3 inch

chip: 420 line Sharp CCD

Power Supply: DC12V

automatic infrared night vision function

### 二、 LCD/DVR

Screen size: 4 inches

Resolution: 480 \* 320 \* RGB

Power supply: Built-in 3.7V rechargeable battery